


Powerware series

Eaton 9155 8 - 30 kVA

Eaton 9355 8 - 40 kVA

Scalable. Compact. Flexible

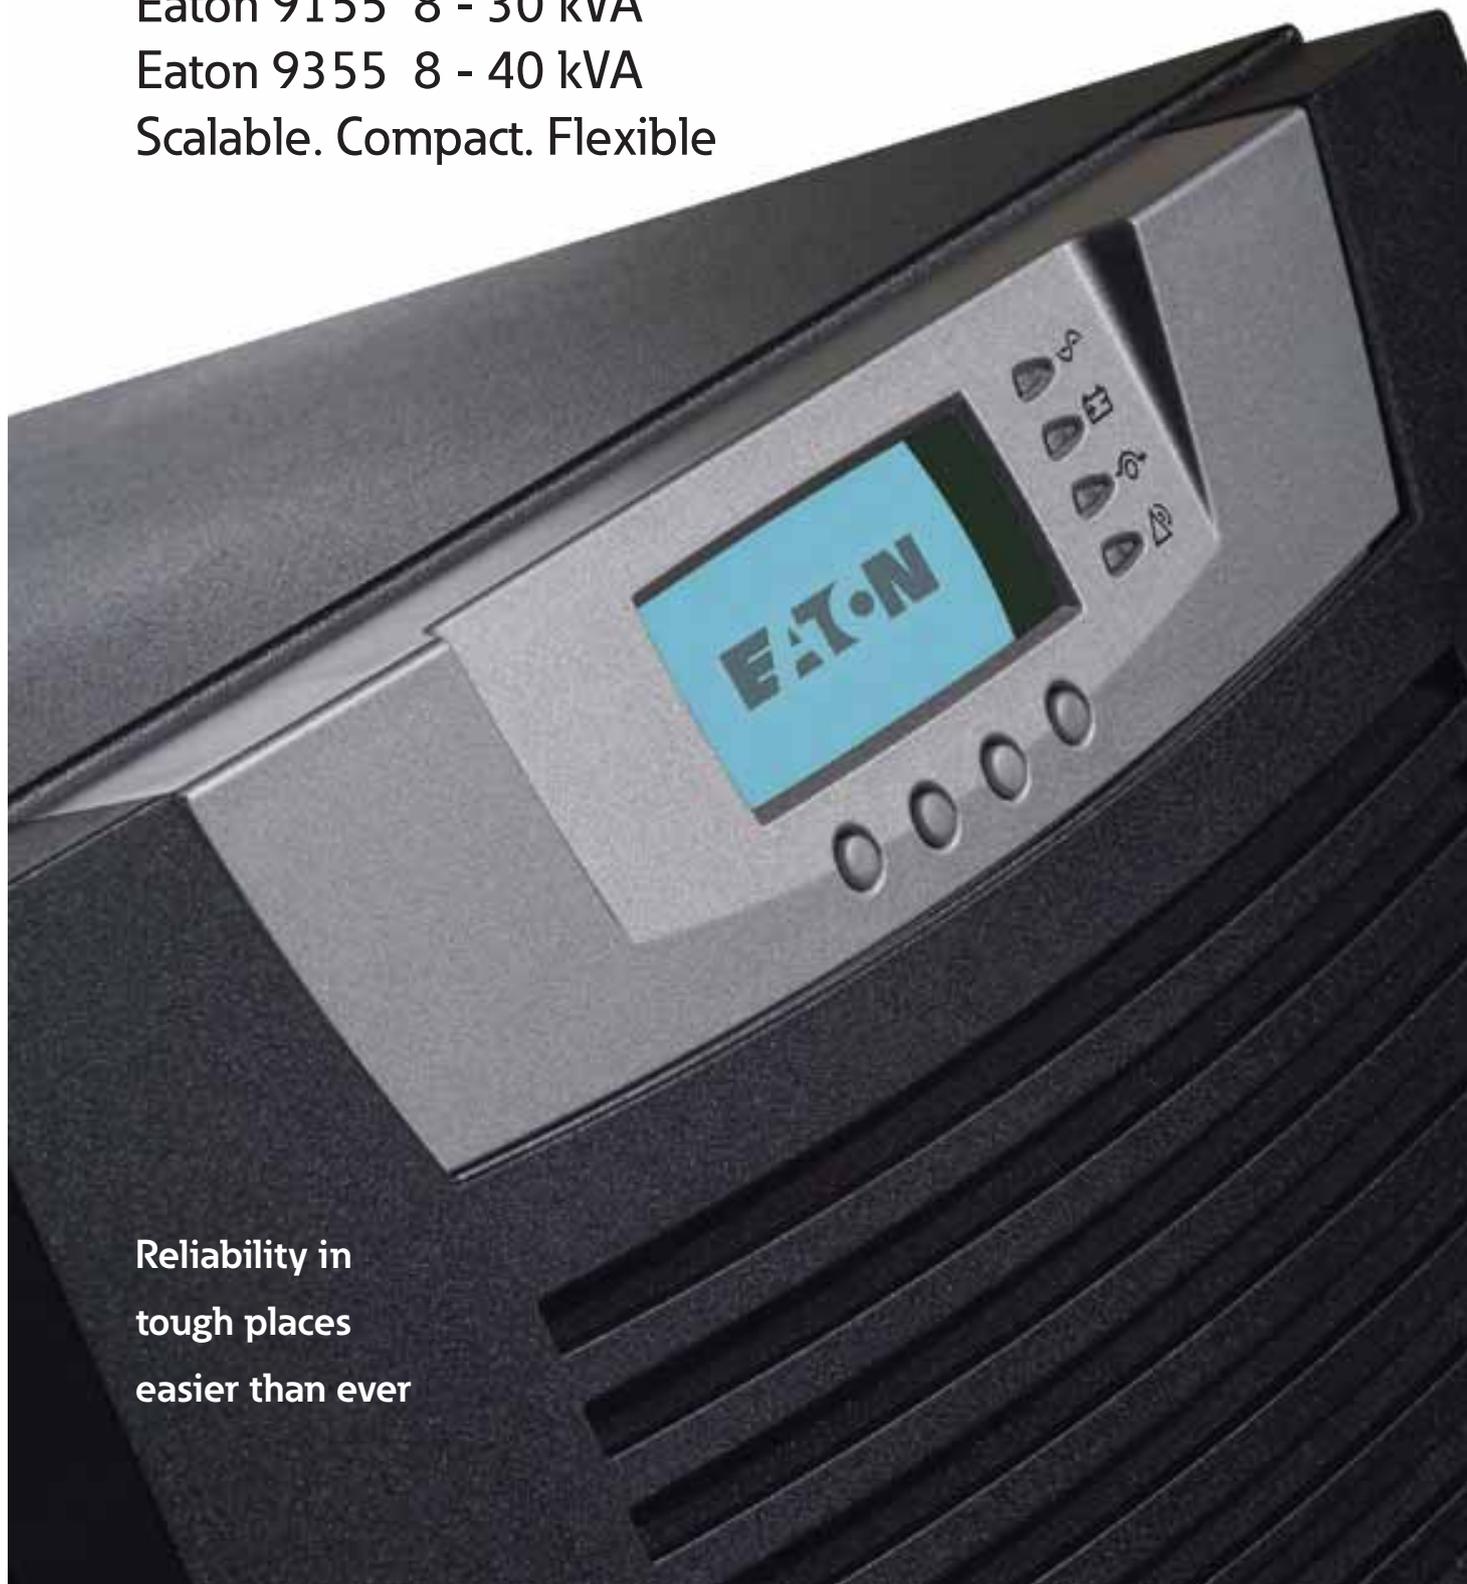

Reliability in
tough places
easier than ever

EATON

Powering Business Worldwide

Like never before

The new Eaton 9155 and 9355, under the Powerware series, combine good looks with uncompromised efficiency and reliability. It provides an affordable solution for 24/7 power protection across a wide range of critical IT and electrical engineering applications. The 9155 and 9355 cover the power range 8–40 kVA and can be paralleled for redundancy and capacity using Eaton's patented Hot Sync® technology.



1. POWER FAILURE



2. POWER SAG



3. POWER SURGE



4. UNDERVOLTAGE



5. OVERVOLTAGE



6. SWITCHING TRANSIENT



7. LINE NOISE



8. FREQUENCY VARIATION



9. HARMONIC DISTORTION



Never before has a UPS been so powerful, yet so slim.

And never before has a UPS had such a combination of features and benefits.

Eaton 9155 and 9355 combine style and small footprint with high performance. With its elegant black casing and its fully graphic, blue backlit LCD display, its strikingly modern appearance sets it clearly apart from the computer-grey masses of older equipment usually found in offices and server rooms.

Reliable

But good looks are just the surface. The 9155 and 9355 are a Series 9 UPSs, meaning that they protect from all of the nine types of most common power disturbances.

Thanks to Eaton's patented Hot Sync technology, two or more UPS units can be paralleled to provide no-compromise protection of the load even if one of the units is out

of commission for service. More than that, the 9155 and 9355's design incorporate well thought-through solutions geared to keep their total life-cycle cost at the lowest possible level.

For example, they have up to 93% efficiency, provide 0.99 input power factor and are rated for 0.9 output power factor loads.

Easy to use

Floor space is expensive. That is why the 9155 and 9355 were designed in a slim, compact tower to provide maximum power per square metre. Their small footprint also means that you will be able to increase your UPS capacity considerably without expanding your present server room. Not to mention easier transport and installation.

Even the standard battery configuration provides integral 31 minutes of backup time (at 20 kVA computer load), and you can extend it to several hours by adding extra battery packs.

The fully graphic LCD display with blue backlight makes the 9155 and 9355 easy to control and monitor. For example, the inputs and outputs are configurable, enabling UPS customisation for the critical application.

With a bundled software suite and a wide range of communication options, the 9155 and 9355 are easy to run remotely using a variety of protocols.

The 9155 and 9355 offer you confidence that lets you stop worrying about power.

Eaton 9155 and 9355 feature inherent reliability. Only the most reliable hardware and technologies are used in their manufacture.

INFORMATION TECHNOLOGY SOLUTIONS

- Data networks, particularly in areas with frequent mains disturbances
- Web server hotels
- Telecom applications
- Financial institutions

ELECTRICAL ENGINEERING SOLUTIONS

- Office buildings
- Manufacturing machinery
- Process control

Reliable hardware, software and world-class service

If your business or application depends on a continuous power supply, look at the Eaton 9155 and Eaton 9355. They will provide you with the most reliable and affordable power protection today, packed in an elegant casing.



Thanks to its new advanced rectifier technology, the 9155 and 9355 give you the best in input power factor control (0.99 PF). Through their low harmonics content (2-5% THDi), the 9155 and 9355 are extremely mainsfriendly.

Reliability is increased by advanced battery management functions such as ABM™ (Advanced Battery Management), automatic discharge testing and temperature compensated charging voltage. Together, they can increase

your battery lifetime considerably and will make sure your batteries — the most important component of the UPS — always remain in top condition!

Because the 9155 and 9355 come bundled with a software suite, you have total control over the system. The software package includes shutdown software, basic-level monitoring and integrates your UPS to your data network.

No mechanical device will run forever without servicing. That is why Eaton offers you additional peace of mind through a range of service agreement options that can easily be customised to your needs and budget. Your Eaton representative will be happy to tell you more.

EATON 9155 AND EATON 9355

| Feature | Benefit |
|------------------------------------|--|
| Double conversion topology | Trouble-free output. Solution for critical 24/7 applications. Zero-break thyristor transfer to bypass for fault clearing. |
| Input power factor control (PFC) | Active 0.99 input power factor control leading to low current distortion in the input. Network friendly and reduces harmonics up to 5% THDi level. |
| Hot Sync® | Patented paralleling technology requires no communication modules, eliminating a system-level single point of failure. |
| Advanced Battery Management (ABM™) | Reduced battery corrosion resulting significantly longer battery lifetime. |
| Self-diagnostics | No unexpected failures. Digital DSP technology constantly monitors internal UPS operation. |
| High output power factor rating | 0.9 output power factor is suitable for today's PFC computer and server loads. |
| Communication options | Wide range of options for network and building management uses, selectable Web/SNMP or ModBus/Jbus as needed. |

Highlights that (almost) let you forget about power

Active power factor control for less disturbances in low-voltage networks

Thanks to their cutting-edge active-front rectifier, the 9155 and 9355 provide a perfect sine-wave input and 0.99 input power factor. This means that they avoid disturbances in the feeding mains network that energy converters tend to cause. With minimal current distortion (2-5% THDi) the 9155 and 9355 are extremely “mains-friendly” and do not require special harmonics filtering.

Hot Sync—unbreakable security


Hot Sync parallels two or more UPS units. Units are capable of load sharing without the need for communications wiring, hitherto the most vulnerable point of failure in all UPS systems. Each module has the ability to synchronize and support the critical load independently of the other modules. Thus all critical loads are supported by UPS-grade power, whatever maintenance needs—scheduled or unscheduled—should arise.

Hot Sync—redundant is an N+1 module system allowing full maintenance to be performed on all modules and the parallel cabinet without the need for an external maintenance bypass and without having to remove the critical load from conditioned power.


ABM—significantly more battery life

ABM constantly monitors battery charge status and only recharges when necessary. Compared with the traditional trickle charging method, this reduces battery corrosion enough to provide significantly longer battery lifetimes! ABM compensates for changes in ambient temperature for proper charging.

Battery monitoring provides real-time information on battery string health and remaining runtime. This allows you to proactively plan maintenance operations instead of reacting to emerging problems. UPS tests the batteries regularly with the rectifier connected, thus providing consistent test results regardless of inverter load at testing time. Moreover, as the load is never supported by the battery alone, the UPS will keep your critical load adequately protected at all times.

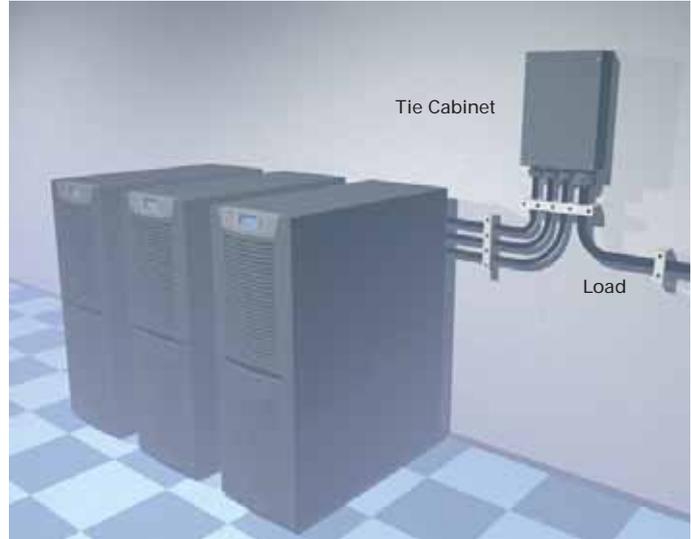

Hot Sync Redundant / Capacity

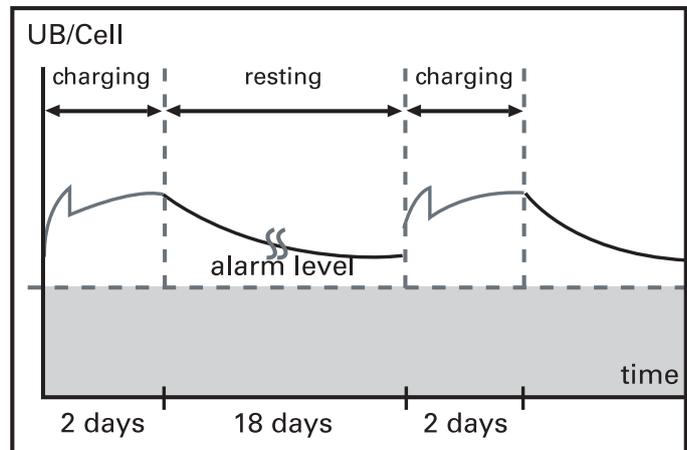

ABM™ with the intermittent charging method

Communication options

—connect anywhere

ConnectUPS Web/SNMP card is a complete UPS monitoring, control and shutdown solution in a networked IT environment. In case of alert the Web/SNMP card can notify users and administrators through email and SNMP traps. In case of a prolonged power failure the protected computer systems can be shut down in a graceful manner with NetWatch and LanSafe software.

HTTP, SNMP, e-mail, WAP and Telnet compatibility enable dynamic and versatile support for a large variety of system configurations.

The XSlot™ card for the 9155 and 9355 also integrates a 3-port switching hub to support multiple PCs or networking equipment.

Environmental Monitoring Probe (EMP) enables you to remotely monitor environmental conditions as easily as you monitor power conditions. It adds temperature, humidity and two contact closure monitoring capabilities to ConnectUPS Web/SNMP card. It can trigger operating system shutdown if user-defined thresholds are exceeded or contact closure status changes.

Relay/AS400 card provides an easy connection to IBM AS/400 series computers as well as industrial and building management systems. You can also build a solution for a remote ON/OFF function with the relay card.

Modbus Card is an XSlot UPS connectivity device that provides continuous, reliable and accurate remote monitoring of your UPS system through a Building Management System (BMS) or Industrial Automation System (IAS). The card integrates data from the UPS into the user's management system using Modicon®, Modbus RTU Protocol. Key power quality and UPS status information may be monitored in real time to aid in the management of the UPS and notification of potential power problems.

Software Suite CD-ROM is bundled with every UPS. It contains LanSafe and NetWatch shutdown solutions.



Dimensions

20–40 kVA



8–15 kVA



ACCESSORIES

External Maintenance Bypass Switch (MBS)

| | |
|----------------|-------|
| 9155-MBS-15kVA | 15 kg |
| 9355-MBS-15kVA | 17 kg |
| 9355-MBS-30kVA | 30 kg |

Battery cabinets (BAT) for 8-15 kVA

| | | |
|----------------------|--------|------------|
| 9X55-BAT5-64x7Ah | 195 kg | (5 years) |
| 9X55-BAT5-96x7Ah | 310 kg | (5 years) |
| 9X55-BAT10-64x7Ah | 195 kg | (10 years) |
| 9X55-BAT10-96x7Ah | 310 kg | (10 years) |
| 9X55-BAT10-L-32x24Ah | 480 kg | (10 years) |
| 9X55-BAT10-L-64x24Ah | 800 kg | (10 years) |

Battery cabinets (BAT) for 20-40 kVA

| | | |
|------------------|--------|------------|
| 9X55-BAT-1x24Ah | 510 kg | (10 years) |
| 9X55-BAT-2x24Ah | 870 kg | (10 years) |
| 9X55-BAT10-1x110 | 520 kg | (10 years) |
| 9X55-BAT10-2x110 | 890 kg | (10 years) |

Connectivity

| |
|---------------------------|
| XSlot: Web/SNMP card |
| XSlot: AS/400 relays card |
| XSlot: RS232 port |
| XSlot: Modbus/Jbus card |
| XSlot: Hot Sync card |

Specials:

| |
|------------------------------|
| Isolation output transformer |
| Input isolation transformer |
| Special colours |
| MarineUPS version |

TECHNICAL SPECIFICATIONS

| Rating | 8 kVA | 10 kVA | 12 kVA | 15 kVA | 20 kVA | 30 kVA | 40 kVA |
|---|--|-----------------------------|-----------------------------|-----------------------------|--------------|--------------|--------------|
| Capacity (kVA/kW) | 8 / 7.2 | 10 / 9 | 12 / 10.5 | 15 / 13.5 | 20 / 18 | 30 / 27 | 40 / 36 |
| Dimensions HxWxD (mm) With extra runtime | 817x305x702 1214x305x702 | 817x305x702 1214x305x702 | 817x305x702 1214x305x702 | 817x305x702 1214x305x702 | 1684x494x762 | 1684x494x762 | 1684x494x762 |
| Weight | | | | | | | |
| UPS+1xBAT | 155 kg | 155 kg | 160 kg | 160 kg | 300 kg | 400 kg | 517 kg |
| UPS+2xBAT | 265 kg | 265 kg | 270 kg | 270 kg | 400-600 kg | 500-600 kg | 617 kg |
| Input connection | UPS input hardwired, Bypass input (redundancy) hardwired | | | | | | |
| Output connection | 1-ph (9155), 3-ph (9355), UPS output hardwired | | | | | | |
| Typical runtime* | | | | | | | |
| UPS+1xBAT | 15 min | 10 min | 8 min | 5 min | 5 min | – min | – min |
| UPS+2xBAT | 33 min | 25 min | 20 min | 15 min | 23 min | 7 min | – min |
| UPS+3xBAT | 49 min | 40 min | 28 min | 22 min | 22 min | 13 min | 8 min |
| UPS+4xBAT | 79 min | 57 min | 45 min | 37 min | 31 min | 20 min | 12 min |

Operational

| | |
|------------------------------|---|
| Nominal input voltage (Vac) | 220/230/240 Vac single phase; 220/380, 230/400, 240/415 Vac three phase |
| Input voltage range | ±20% from nominal at 100% load, -50%, +20% from nominal at 50% load |
| Operating frequency | 50/60 Hz (45 to 65 Hz) |
| Input power factor | 0.99 |
| Input current distortion | 2-5% THD in nominal load condition |
| Nominal output voltage | 220/230/240 Vac single phase (9155), 380/400/415 Vac three phase (9355) |
| Output voltage regulation | ±2% static; ±5% dynamic at 100% load change, < 1 ms response time |
| Overload capacity | 150% for 1 min / 125% for 10 min / 110% for 60 min (mains available) 150% for 5 sec (on battery) |
| Permitted load power factors | 0.7 lag – 0.8 leading, no derating needed |
| Efficiency | 92% with computer load, 93% with linear load |

User interface

| | |
|------------------------------|--|
| LCD display | Graphical LCD with blue backlight: English, French, German and Spanish languages std. |
| LED | 4 LED |
| Standard communication ports | 1 x RS232 for local support, 2 x XSlot (empty); 1 x relay contact, 1 x emergency power-off input, 2 x environmental input |
| Optional | External battery cabinets; Temperature Probe (EMP) Isolation transformer; External Maintenance Bypass Switch (MBS) Slot connectivity: Web/SNMP, Modbus/Jbus, Relay, Hot Sync, RS 232 cards |

Environmental

| | |
|-----------------------|--|
| Operating temperature | 0°C to +40°C, +45°C with 7.5% derating; Batteries recommended max. +25°C |
| Storage temperature | -15°C to +45°C |
| Altitude | < 1000 m |
| Audible noise | < 50 dB(A) at 1 meter (noise less room); 53 dB(A) according to ISO 7779 |

Certification, standards & conformities

| | |
|----------------------------|--|
| Quality | ISO 9001: 2000 and ISO 14001:1996 |
| Markings | CE and GOST marking |
| Safety | IEC 62040-1-1, IEC 60950, EN 62040-1-1 |
| EMC | EN 50091-2 Class AN |
| Performance classification | IEC 62040-3 VFI-SS-111 |

*All runtime base on 0.7 load PF.

In the interests of continuous product improvement all specifications are subject to change without notice.

SINGAPORE

Tel : +65 6825 1684

Fax : +65 6825 1689

EatonSEA@eaton.com

INDONESIA

Tel : +62 21 522 6181

Fax : +62 21 522 6182

MALAYSIA

Tel : +603 7804 3618

Fax : +603 7803 6193

THAILAND

Tel : +66 2575 0530

Fax : +66 2575 1579

VIETNAM

Hanoi

Tel : +84 4 3936 5303

Fax : +84 4 3936 5307

Ho Chi Minh

Tel : +84 8 6255 6737

Fax : +84 8 6255 6801

Eaton and Powerware are a trade names,
trademarks and/or services mark of Eaton
Corporation or its subsidiaries and affiliates.