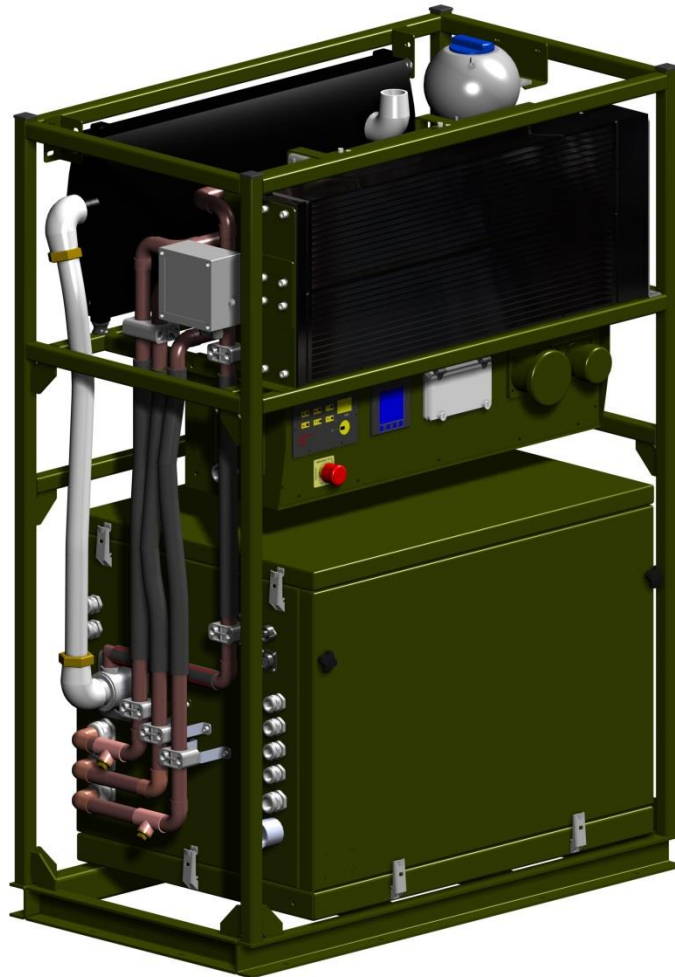


**POWER GENERATORS FOR EXTREME REQUIREMENTS**

**Fully enclosed military diesel power generators for permanent installation in vehicles and shelters.**

**Very flexible mounting system for extreme space constraints.**

**Rack version with or without tank**

**Technical data**

	Power kW	Power kVA	Voltage	Frequency Hz	Engine	Coolant E / G	Noise dB
<b>Camino 10DSR</b>	8	10	230/400	50	Kohler	water	56
<b>Camino 12DSR</b>	10	12.5	230/400	50	Kubota	water	56
<b>Camino 15DSR</b>	12.5	15	230/400	50	Kohler	water	56
<b>Camino 20DSR</b>	16	20	230/400	50	Kohler	water	56
<b>Camino 25DSR</b>	20	25	230/400	50	Mitsubishi	water	56



Stange Energietechnik GmbH

## Technical Data Sheet

# SET Camino "Rack"

Article-No:

**XXXXX-00000**

### Standard equipment

- Super sound capsule; all filters at one maintenance side
- Asynchronous generator, short circuit proof, water-cooled and suitable for unbalanced load
- Cooled exhaust system in the enclosure
- Exhaust silencer with high attenuation
- Cooling unit with circulation pumps and 230V fans with speed controller
- Basic control panel with key switch
- Electronical engine management with battery charger and automatic shutdown when: oil pressure too low, high temperature, water loss
- Computer optimized arrangement of the anti-vibration shock mounts, 4g in all directions.
- 1x Socket 2P/24V VG96917, 1x Socket 16A 230V 2P, 1x CEE 400V 5-pin

### Safety devices

- 1x MCB 16 A (B) 1P
- 1x MCB 16-32 A (C) 3P
- 1x RCD 16-40/ 0,03A, 4P
- Extremely quiet operation 56 dB(A) @7m
- Colour RAL 6031 green bronze
- Operating condition -32 °C / + 50 °C
- Storage temperature -40 °C / + 70 °C
- EMC to VG95373 class3
- industry documentation

### Additional items

- Fully electronic control panel with LCD Display and Auto Start System
- Starting temperature -40°C
- Insulation monitoring
- Any RAL colour possible
- EMC to Mil STD 461G

For any enquiry, please contact:  
**APECUS TECHNOLOGIES PTE LTD**  
7030 Ang Mo Kio Ave 5  
#06-50 Northstar@AMK  
Singapore 569880  
Tel: (65) 65708068  
Fax: (65) 65708066  
Website: [www.apecus.com](http://www.apecus.com)  
Email: [sales@apecus.com](mailto:sales@apecus.com)

Copyright © 2014 APECUS Technologies.  
All Rights Reserved.  
Printed in Singapore

**APECUS**  
Power solutions for all



**TÜVRheinland®**  
**CERT**  
ISO 9001