




Technical Data Sheet

Article-No:

SET Camino "Tunnel"

xxxxxx-00000

POWER GENERATORS FOR EXTREME REQUIREMENTS

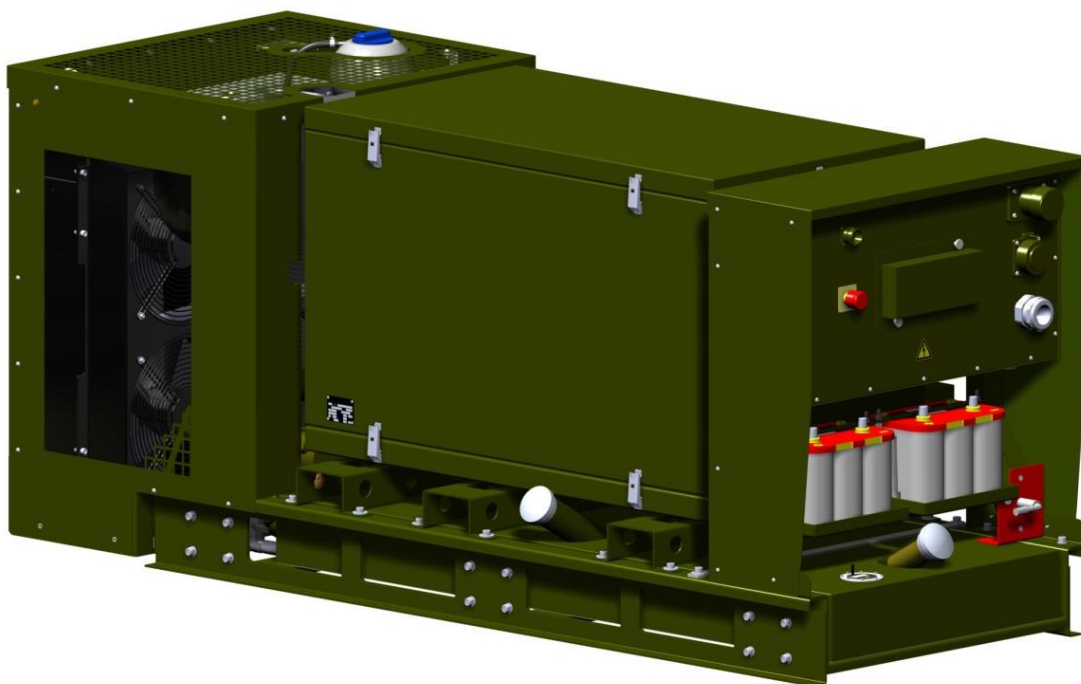

Fully enclosed military diesel power generators for permanent installation in shelters or stand alone.

Very flexible mounting system for extreme space constraints.

Version Tunnel

Technical data:

	Power kW	Power kVA	Voltage	Frequency Hz	Engine	Coolant E / G	Noise dB
Camino 8T	5.5	6.6	230	50	Kubota	water	56
Camino 10DST	8	10	230/400	50	Kohler	water	56
Camino 12DST	10	12.5	230/400	50	Kubota	water	56
Camino 15DST	12.5	15	230/400	50	Kohler	water	56
Camino 20DST	16	20	230/400	50	Kohler	water	56
Camino 25DST	20	25	230/400	50	Mitsubishi	water	56
Camino 30DST	30	32	230/400	50	Kohler	water	56
Camino 40DST	38	45	230/400	50	Deutz	oil/water	63



Stange Energietechnik GmbH

Technical Data Sheet

SET Camino "Tunnel"

Article-No:

xxxxx-00000

Standard equipment

- Super sound capsule; all filters at one maintenance side
- Asynchronous generator, short circuit proof, water-cooled and suitable for unbalanced load
- Cooled exhaust system in the enclosure
- Exhaust silencer with high attenuation
- Cooling unit with circulation pumps and 230V fans with speed controller
- Fuel tank 80-120l
- Basic control panel with key switch
- Electronical engine management with battery charger and automatic shutdown when: oil pressure too low, high temperature, water loss
- Computer optimized arrangement of the anti-vibration shock mounts, 4g in all directions.
- Socked IP 67 mil1x Socket outlet 16A 230V 2P + E 1x CEE 400V 5-pin

Safety devices

- 1x MCB 16 A (B) 1P
- 1x MCB 16 -63 A (C) 3P
- 1x RCD 30-63, 03A, 4P
- External start 24V socket to VG
- Quiet operation 56 dB(A) @7m
- Colour RAL 6031 green bronze
- Operating condition -32 °C / + 50 °C
- Storage temperature -40 °C / + 70 °C
- EMC to VG95373 class3
- industry documentation

Additional items

- 3/4 pull-out rails in cooler direction
- Fully electronic control panel with LCD Display and Auto Start System
- Starting temperature -40°C
- Insulation monitoring
- Any RAL colour possible
- EMC to Mil STD 461G

For any enquiry, please contact:
APECUS TECHNOLOGIES PTE LTD
7030 Ang Mo Kio Ave 5
#06-50 Northstar@AMK
Singapore 569880
Tel: (65) 65708068
Fax: (65) 65708066
Website: www.apecus.com
Email: sales@apecus.com

Copyright © 2014 APECUS Technologies.
All Rights Reserved.
Printed in Singapore

APECUS
Power solutions for all



TÜVRheinland®
CERT
ISO 9001