




## POWER GENERATORS FOR EXTREME REQUIREMENTS

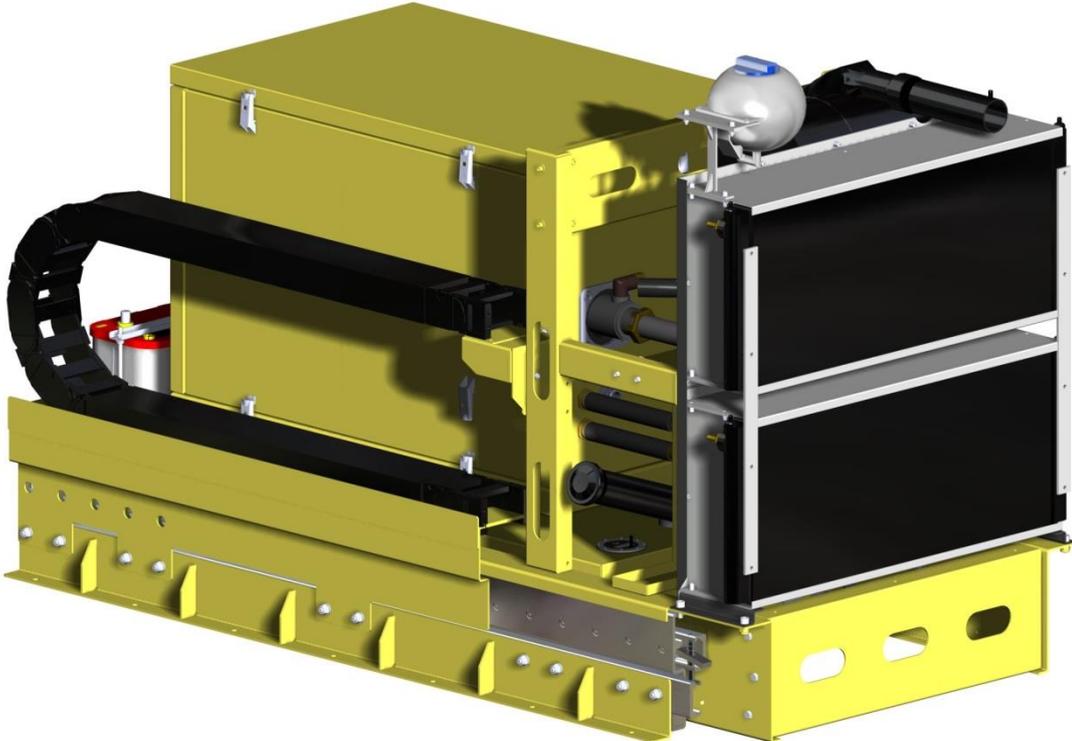

Fully enclosed military diesel power generators for permanent installation in vehicles and shelters.

Very flexible mounting system for extreme space constraints.  
**Slider version**; base frame with full extension and cooling unit in front.

## Technical data

	Power kW	Power kVA	Voltage	Frequency Hz	Engine	Coolant E / G	Noise dB
Camino 8S	5.5	6.6	230	50	Kubota	water	56
Camino10DSS	8	10	230/400	50	Kohler	water	56
Camino 12DSS	10	12.5	230/400	50	Kubota	water	56
Camino 15DSS	12.5	15	230/400	50	Kohler	water	56
Camino 20DSS	16	20	230/400	50	Kohler	water	56
Camino 25DSS	20	25	230/400	50	Mitsubishi	water	56
Camino 30DSS	30	35	230/400	50	Kohler	water	56
Camino 40DSS	38	45	230/400	50	Deutz	oil/water	63



Stange Energietechnik GmbH

## Technical Data Sheet

# SET Camino "Slider"

Article-No:

**XXXXX-00000**

### Standard equipment

- 100% pull-out rails in cooler direction
- Super sound capsule; all filters at one maintenance side
- Asynchronous generator, short circuit proof, water-cooled and suitable for unbalanced load
- Cooled exhaust system in the enclosure
- Exhaust silencer with high attenuation
- Cooling unit with circulation pumps and 230V fans with speed controller
- Basic control panel with key switch
- 1x socket 2P/24V VG96917
- Electronical engine management with battery charger and automatic shutdown when: oil pressure too low, high temperature, water loss
- Computer optimized arrangement of the anti-vibration shock mounts, 4g in all directions.

### Safety devices

- Extremely quiet operation 56 dB(A) @7m
- Colour RAL 6031 green bronze
- Operating condition -32 °C / + 50 °C
- Storage temperature -40 °C / + 70 °C
- EMC to VG95373 class3
- industry documentation

### Additional items

- Fully electronic control panel with LCD Display and Auto Start System
- Starting temperature -40°C
- Insulation monitoring
- Fuel tank 80-160l
- Any RAL colour possible
- EMC to Mil STD 461G

For any enquiry, please contact:  
**APECUS TECHNOLOGIES PTE LTD**  
7030 Ang Mo Kio Ave 5  
#06-50 Northstar@AMK  
Singapore 569880  
Tel: (65) 65708068  
Fax: (65) 65708066  
Website: [www.apecus.com](http://www.apecus.com)  
Email: [sales@apecus.com](mailto:sales@apecus.com)

Copyright © 2014 APECUS Technologies.  
All Rights Reserved.  
Printed in Singapore

**APECUS**  
Power solutions for all



TÜVRheinland®  
**CERT**  
ISO 9001